

Silicone Rubber Heaters

Improve Heat Transfer, Speed Warm Ups and Decrease Wattage Requirements

Rugged, yet thin, lightweight and flexible—the use of Watlow® silicone rubber heaters is limited only by the imagination. Heat can be placed where it is needed to improve heat transfer, speed warm ups and decrease wattage requirements in an application process.

Fiberglass-reinforced silicone rubber gives the heater dimensional stability without sacrificing flexibility. Because very little material separates the element from the part, heat transfer is rapid and efficient. The heaters are constructed with a wire-wound element or an etched-foil element. The thin construction allows them to fit into applications where space is limited.

Performance Capabilities

- Operating temperatures up to 500°F (260°C)
- Watt densities up to 80 W/in² (12.5 W/cm²), dependent upon application temperature
- Wire-wound element thickness — 0.055 in. (1.4 mm)
- Etched-foil element — 0.022 in. (0.56 mm)
- UR®, cUR®, VDE and CE recognitions are available on many designs up to 428°F (220°C)

Features and Benefits

Designed to the exact shape and size needed

- Conforms to your component and/or equipment

More than 80 designs available immediately from stock

- Reduces downtime

Constructed with wire-wound or etched-foil elements


- Delivers a thin, lightweight heater
- Provides the desired flexibility for many dynamic applications
- Delivers low mass and easily repeatable distributed watt densities

Moisture- and chemical-resistant silicone rubber material

- Provides longer heater life

Vulcanizing adhesives or fasteners

- Allows heaters to be easily bonded to the part

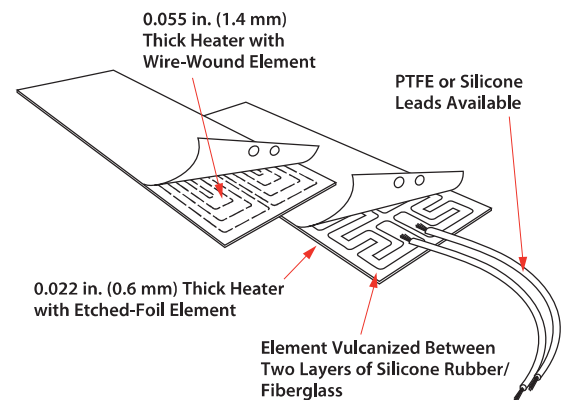

Typical Applications

- Freeze protection and condensation prevention for many types of instrumentation and equipment
- Medical equipment such as blood analyzers and test tube heaters
- Computer peripherals such as laser printers
- Curing of plastic laminates
- Photo processing equipment
- Semiconductor processing equipment


Mounting Methods

- Pressure sensitive adhesive
- Silicone contact cement kit
- Field applied adhesives (silicone RTV)
- Mechanical fasteners
- Factory bonding

Termination Styles

Watlow offers many types of leads and terminations. Leads can project from any position along the perimeter of the unit. **They will be centered on the short side width of rectangular heaters unless otherwise specified.**


PTFE UL® 1180 CSA

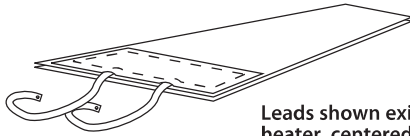

Leads shown exiting end of heater, centered on short side

Watlow's leads are PTFE insulated, flexible, plated copper UL® 1180 CSA wire and available in most lengths. They are rated for 392°F (200°C)/300V. The lead connections on or at the heater are insulated with a cap of sheath material, vulcanized to the heater body.


PTFE Leads

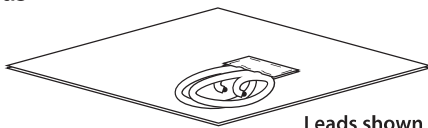

Leads shown exiting middle of heater

PTFE Type E (MIL-W-16878) and PTFE UL® 1199 rated for 392°F (200°C)/600V are also available.

Silicone Insulated Leads

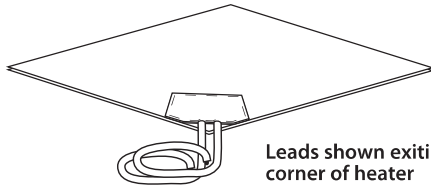

Leads shown exiting corner of heater


For a better moisture seal, specify UL® silicone insulated lead wires. This lead type is rated for 302°F (150°C)/ 600V. Any lead length is available. **Note:** Silicone rubber heaters are not designed to be waterproof. Excess exposure to moisture may facilitate premature heater failure.

Option

Thermal Insulation

To increase the heating efficiency of your application, silicone rubber heaters can be thermally insulated with silicone sponge rubber, bonded to one side in the following thicknesses: 1/16, 1/8, 1/4, 3/8 or 1/2 in. (1.6, 3.2, 6, 9.5 or 13 mm).

An aluminized surface can be added to the back of the heater to reduce radiated heat losses. This aluminized surface, called "low loss treatment," adds very little to the unit thickness and maintains a very clean appearance.



Powered by Possibility

To be automatically connected to the nearest North American Technical Sales Office:

1-800-WATLOW2 • www.watlow.com


International Technical Sales Offices:

Austria	+43 6244 20129 0	India	+91 40 6661 2700
China	+86 21 3532 8532	Italy	+39 02 458 8841
France	+33 1 41 32 79 70	Japan	+81 3 3518 6630
Germany	+49 7253 9400 0	Korea	+82 2 2169 2600

Mexico	+52 442 256 2200
Singapore	+65 6773 9488
Spain	+34 91 675 1292
Taiwan	+886 7 288 5168
UK	+44 115 964 0777


Extended Capability Options

Factory Bonding




This attachment technique provides a strong, void-free bond for excellent heat transfer and extended heater life that has proven to be successful. Bonding is recommended for applications that reach maximum temperatures of 500°F (260°C) on silicone rubber and 300°F (150°C) on polyimide.

Formed Heaters



Many three-dimensional shapes, such as cylinders, cones and boxes, can be factory formed. Semi-rigid shapes can be self-gripping to the part. Special tooling may be required for some designs.

Holes, Cutouts and Notches

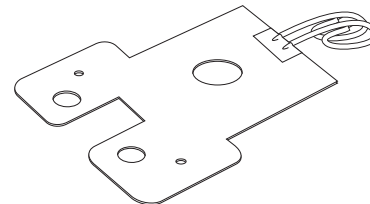

Watlow can provide flexible heaters with special holes, cutouts and notches in nearly any position required for your design. The resistance element can be brought to within 1/8 in. (3.2 mm) of all edges. Standard spacing is 1/4 in. (6 mm) from all edges.

Watlow® is a registered trademark of Watlow Electric Manufacturing Company. UL®, UR® and cUR® are registered trademarks of Underwriter's Laboratories, Inc.